


Rotary sealing table Type VT-H4

LENHARDT

- Integrated vacuum suction pads for safe holding of the insulating glass unit
- Pneumatically liftable table surface for optimal ergonomical working conditions
- Sealing of overstanding insulating glass edges without risk of soiling
- Four extractable telescope support girders
- Convenient transfer of insulating glass units by all direction rollers
- Two rotating directions
- Stepless adjustable rotating speed for both rotating directions

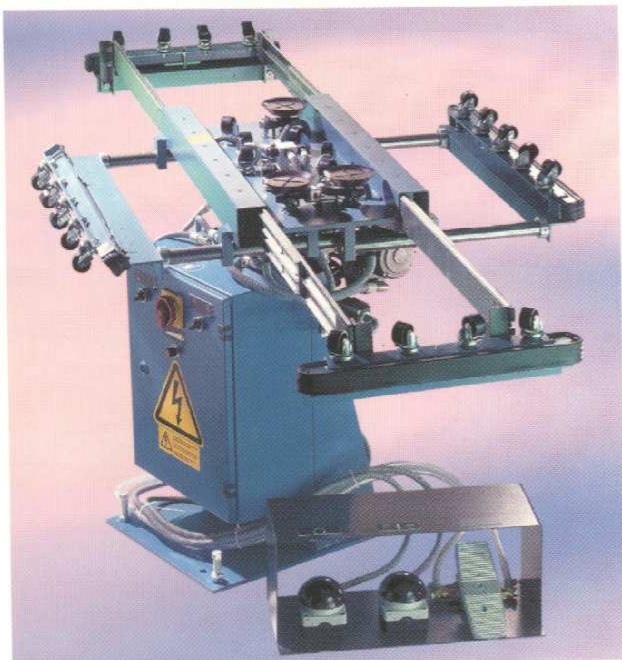

Four extractable telescope support girders

- Optimum survey of sealing area for quality control
- Free hands for sealing ensured by foot switch control
- Continuous sealing by alternating operation with two or more rotary sealing tables
- Wide adjustment range of table area



Adaptor plate for smaller insulating glass units

Option

- Adaptor plate with one central suction pad for sealing of smaller insulating glass units

Technical data

- Adjustment range of table area:

min. 380 x 720 mm	(14.960" x 28.346")
max. 1120 x 2000 mm	(3.674 x 6.561 feet)
- Processable dimensions:

min. 400 x 740 mm	(15.748" x 29.133")
max. 1500 x 2400 mm	(4.921 x 7.874 feet)
- Working heights:

approx. 850 mm	(2.788 feet) and approx.
1050 mm	(3.444 feet)
- Suction pad diameter:

160 mm or 250 mm	(6.299" or 9.842")
------------------	--------------------